

Extension lead wire thermocouple and resistance temperature detector


Model : R300 series

Spec. sheet no. **RD03-01**

Service intended

This type of detector does not use terminal head, rather it directly connects to an indicator or a transmitter. It is very useful where the distance between measuring parts and the location of its head is too far. The measuring parts and its head can be connected by using an extension wire.

Extension wire can be selected according to its installation site condition, its protection shape of armored tube, and its wire covering material.

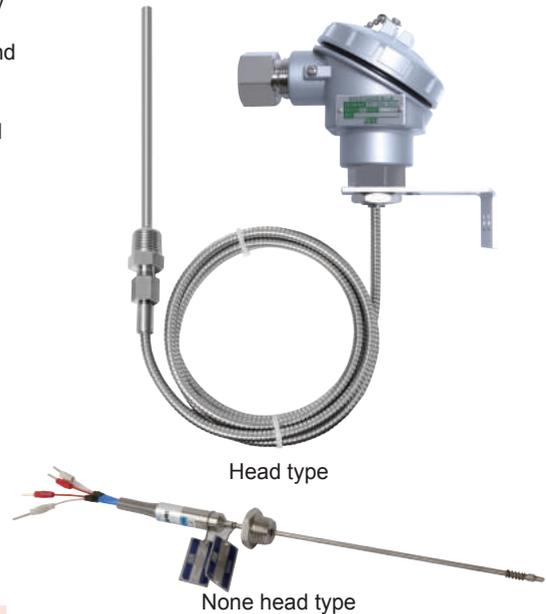

Standard features

Element




Thermocouple : K, E, J, T, N, R, S, B
 RTD : Pt 100 Ω at 0°C (Ceramic and Mica type)

Tolerances on temperature reading

■ Thermocouple
 Class 1, Class 2 (DIN/IEC584-2, BS/EN60584-2, JIS C1602)
 Special, Standard (ASTM E230, E988, ISA-MC96.1)

■ R.T.D.
 Class A : $\pm (0.15 + 0.002 | t |)$
 Class B : $\pm (0.3 + 0.005 | t |)$

Basic outline drawing

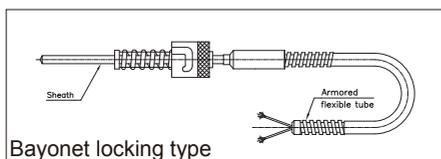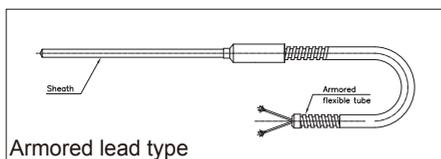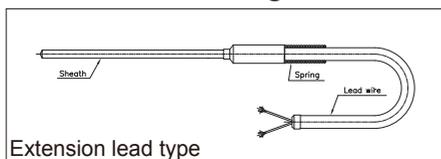

Sheath outer diameter

■ Thermocouple
 1.0, 1.6, 2.3, 3.2, 4.8, 6.4, 8.0, 9.5 and 12.7 mm
 * Double element is not available for 1.0 and 1.6 mm sheath outer diameter

■ R.T.D.
 3.2, 4.8, 6.4 and 8.0 mm

Sensing element structure

Protection tube or sheathed

Protecting tube outer diameter

6.4, 8.0, 10.0, 12.0 and 15.0 mm

1. Base model

R311	Extension lead type single element
R312	Extension lead type double element
R321	Armored lead type single element
R322	Armored lead type double element
R331	Bayonet locking type single element
R332	Bayonet locking type double element

2. Head type

A	General (Weatherproof)
P	None head

3. Element (Tolerance)

K	K (0.75)	3	T (0.4)
J	J (0.75)	4	E (0.4)
T	T (0.75)	5	N (0.4)
N	N (0.75)	R	R (0.25)
E	E (0.5)	S	S (0.25)
B	B (0.5)	Q	Pt 100 Ω (B)
1	K (0.4)	9	Pt 100 Ω (A)
2	J (0.4)	Z	Other

4. Sheath or protecting tube material

0	304SS
1	316SS
2	Inconel 600
3	310SS
4	446SS
5	347SS
6	321SS
7	316L SS
9	Other

5. Sheath or protecting tube outer diameter (mm)

A9	1.0 (Sheath / Single TC only)
B9	1.6 (Sheath / Single TC only)
C9	2.3 (Sheath / TC only)
D9	3.2 (Sheath)
E9	4.8 (Sheath)
F9	6.4 (Sheath)
G9	8.0 (Sheath)
H9	9.5 (Sheath / TC only)
L9	12.7 (Sheath / TC only)
E8	4.8 (Tube / Not available for double RTD)
F8	6.4 (Tube)
G8	8.0 (Tube)
J0	10.0 (Tube)
K9	12.0 (Tube)
M9	15.0 (Tube)

6. Conduit connection

1	½" PF
2	½" PT
3	½" NPT
4	¾" PF
5	¾" PT
6	¾" NPT
7	None
8	M20 x 1.5P
9	Other

7. Lead wire length (m)

A	300 mm (Standard), Lead wire type only
B	1 (Lead wire type only)
C	2 (Lead wire type only)
D	3 (Lead wire type only)
E	4 (Lead wire type only)
F	5 (Lead wire type only)
G	Other

8. Mounting type

X	Refer to mounting table (12 th character)
----------	--

9. Connection type

XX	Refer to mounting table (13 th and 14 th character)
-----------	---

10. Insert length

X	Refer to insert length table (15 th character)
----------	---

11. Option

00	None
01	Accessories
1A	Epoxy coated ALDC head
1B	Head material : 304SS
1C	Head material : 316SS
1D	Accessories and epoxy coated ALDC head
1E	Accessories and head material : 304SS
1F	Accessories and head material : 316SS

1	2	3	4	5	6	7	8	9	10	11
R311	P	K	1	F9	1	A	X	XX	X	00

Sample
ordering
code

Mounting, connection type and insert length table - 11th thru 14th characters

12 th character		13 th character		14 th character		15 th character	
Code	Mounting	Code	Connection size and connector material	Code	Connection type	Code	Insert length (mm)
A	None	A	None	A	None	A	100
	Fixed thread lag length	B	1/8" and 304SS	B	PT	B	200
B	80 mm	C	1/4" and 304SS	C	NPT	C	300
C	100 mm	D	3/8" and 304SS	D	PF	D	400
D	150 mm	E	1/2" and 304SS	E	NPS	E	500
E	200 mm	F	3/4" and 304SS	F	UNF	F	600
F	Other	G	1" and 304SS	G	BSPT	G	700
	Fixed flange lag length	H	1 1/4" and 304SS	H	BSPF	H	800
G	80 mm	J	1 1/2" and 304SS	J	MM	J	900
H	100 mm	K	2" and 304SS	K	B16.5 Class 150 RF	K	1,000
J	150 mm	L	3" and 304SS	L	B16.5 Class 150 FF	L	1,500
K	200 mm	M	7/16" and 304SS	M	B16.5 Class 300 RF	M	2,000
L	Other	N	1/2" and 316SS	N	B16.5 Class 300 FF	N	2,500
M	Movable thread	P	3/4" and 316SS	O	Sanitary	P	3,000
N	Movable flange	Q	5/8" and 316SS	P	B16.5 Class 600 RF	Q	3,500
P	Compression fitting	R	1/2" and 316SS	Q	B16.5 Class 600 FF	R	4,000
	Union and nipple length	S	3/4" and 316SS	R	JIS 5K RF	S	4,500
Q	100 mm length	T	1" and 316SS	S	JIS 5K FF	T	5,000
R	150 mm length	U	1 1/4" and 316SS	T	JIS 10K RF	U	6,000
S	Other	V	1 1/2" and 316SS	U	JIS 10K FF	V	7,000
	Nipple length	W	2" and 316SS	V	JIS 20K RF	W	8,000
T	50 mm	X	3" and 316SS	W	JIS 20K FF	X	9,000
U	100 mm	Y	7/16" and 316SS	X	B16.5 Class 1,500 RTJ	Y	10,000
V	150 mm	Z	Other	Y	B16.5 Class 2,500 RTJ	Z	Other
W	Other			Z	Other		
X	Fixed thread						
Z	Other						

- Note for 15th character, please choose a code of next higher length if applicable length is not. Actual length shall be specified.
- Note for *Y code (Oil sealing type), only available with spring-loaded head type.